



Micro Finisher

ONLY 85CM WIDE!
FEATURE PACKED DESIGN
MODULAR DESIGN
CHOICE OF COLOURS
TOOLING OPTIONS
FULL RANGE OF SPARES





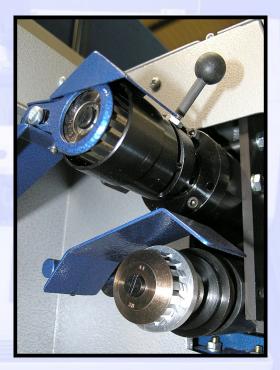



Available with either 3 phase (400 Volts, 50Hz power supply) or 1 phase (230 Volts, 50Hz power supply)

Micro Finisher

Usual specifications for the Micro Finisher

High Speed Steel top-piece trimmer (no cutter sharpening tool)

Machine to include 3 bayonet fitting cutter holders 3mm, 8mm cutters and shields and groover

Naumkeag and breaster on interchangeable bayonet fittings

1500 x 75mm scouring band

Manual turret to brush and pad section incorporating 2 sets of brush & pad (or mop) and 1 brush and 1 fine scouring roll


Integral exhaust fan and filter unit

Stove dried Hammer paint finish

Dimensions 850mm (including handle)
W x 795mm D (minimum of 750mm for delivery)
x 1720mm H.

Weight - 285 Kilos.



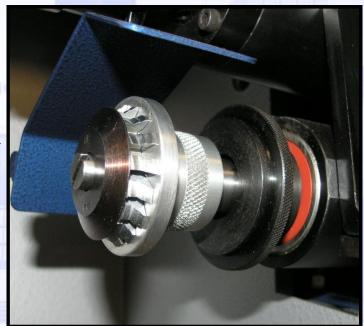

www.standardgroup.co.uk



Main options available for the Micro Finisher

A trimming head with top-piece scouring roll (micro band) instead of heel cutter


Edge iron on bayonet fitting to interchange with naumkeag/ breaster

Rack to cover the finisher



Micro Finisher

Mini roll instead of heel cutter

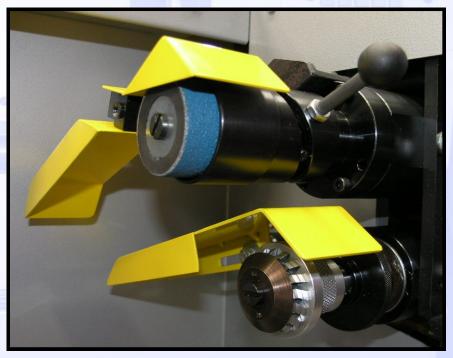

www.standardgroup.co.uk







Micro Unit

"Micro Unit"
Micro Finisher,
with our new 50cm Press

Overall width ONLY 135cm!

This is the same width as our Model 700 series Finishers!



standard





The "Micro Unit" at the 2015
Cutting Edge Exhibition



